


# User's Manual

--54\*3w RGBW Zoom Led Par Light

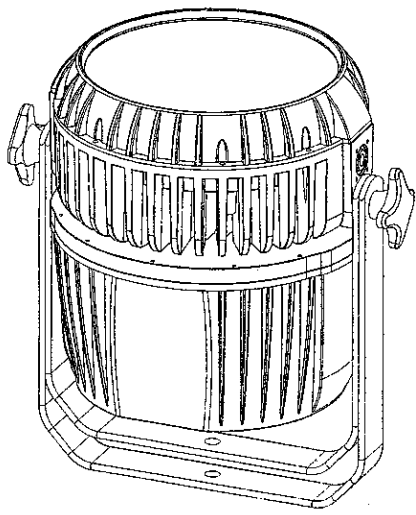

## Index

Description	2
Specs	2
Safety tips	2
Main Features	2
DMX Mode	3
Menu	3

## ○ Description

Thank you for choosing our products, please read this manual carefully and keep it properly for reference. This manual contains important information about the installation and use of the 54\*3W RGBW Zoom Led Par Light. Strictly observe these instructions when installing and using.

The 54\*3W RGBW Zoom Led Par Light using aluminum shell manufacturing, with beautiful appearance and high efficiency, durable, suitable for indoor/outdoor use. The product design and production is strictly fitting to the international standard DMX512 protocol, already approved by CE standard. It has auto mode, also can be connected hand by hand, perfect for large-scale theatrical performances, theatre, studio, deeko.

## ○ Specs

- Input Voltage: AC100V-240V, 50/60HZ
- Power consumption: 180W
- Light Source: 54\*3w led lamp(R:12PCS,G:15PCS,B:15PCS,W:12PCS)
- IP Rating: IP 64
- Working mode: DMX512
- Lifespan: 80000~100000h ours
- Net Weight: 9.5kg
- Packing Size: 295×295×370mm

## ○ Safety tips

All personnel involved in the installation and maintenance of this equipment must understand:

- (1) Have electrical technician qualification;
- (2) Before leaving the factory the light has been strictly qualified after the inspection. To ensure proper and safe operation of these conditions, the user must comply with the following safety precautions and precautions.
- (3) The manufacturers will not be responsible for any failure/accidents/losses caused by not following this manual normal operation, or secretly changing the device without permission.

Equipment installation and maintenance attention:


- (1) Please pay special attention to the power supply voltage, to ensure that the use of voltage is in the voltage range of technical parameters identified.
- (2) Please make sure that the power switch socket is good when using AC110V-220V. To ensure the safe use of power supply, please use a qualified power outlet or cut off the plug directly connected to the switch. The earth wire is yellow.
- (3) Please avoid collision with the hard metal object in the installation and use.

○ **Main Features:**

- (1)The standard DMX512 control console, the DMX address is optional
- (2)The IP address code expansion function
- (3)Self programming mode, auto operation mode, external control mode
- (4)Gray level :256 x 256 x 256
- (5)Strobe, soft-light function

○ **DMX Mode**

9chs	5chs	Features	Function
CH1	CH1	Brightness of RED	0: off 1-255 from dim to bright
CH2	CH2	Brightness of Green	0: off 1-255 from dim to bright
CH3	CH3	Brightness of Blue	0: off 1-255 from dim to bright
CH4	CH4	Brightness of White	0: off 1-255 from dim to bright
CH5		Dimmer	0: off 1-255 from dim to bright
CH6		Strobe	0: off 1-79: fast on and fast off 80-159 slow on and fast off 160-255fast on and slow off
CH7		Color jump	0: off 2-63: red and blue jump 64-127: red and green jump 128-191: blue and green jump 192-255: red,green and blue jump
CH8		Color fade	0: off 1-255 fading speed: fast to slow
CH9	CH5	Zoom	0-255 Zoom

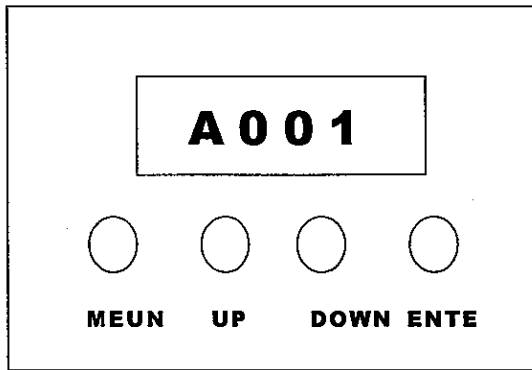○ **Menu****1.Setting of DMX512 address:**

Press "Menu" button, Chose A001,Press "UP" or "DOWN"set different dmx address(from [1]-[255]);The value will be saved automatically; Press "MEUN"to exit and enter the next function.

**2.Chose the different channels(5chs and 9chs)**

Press "Menu" button, Chose 5cH or 9cH, The value will be saved automatically.Press "MEUN"to exit and enter the next function.