


VSL-ZMP18-5

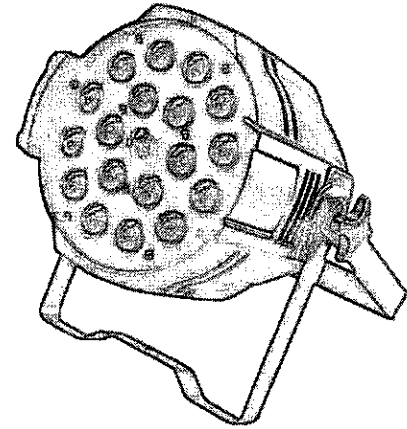

User Manual

Main Features:

- 1) Five Operating Modes: DMX512, Master/Slave, Audio Detected, Auto-run;
- 2) Master/Slave is auto set down when the first light opened;
- 3) Taiwanese High Power LED Chips;
- 4) Switching Power Supply Unit.
- 5) Technical Specifications:

Power Supply	AC90-250V, 50/60Hz
Power Consumption	180W
LED Quantity	18pcs X 15WLEDs (R18, G18, B18, W18, A18)
Service Life	Exceed 50,000 hours
DMX Channel	6/10CH
Zoom Angle	15-60 degree
Working Mode	DMX512, Master/Slave, Audio Detected, Auto-Run
Dimension	25*25*36 (single packing) 53*53*40cm (4units/carton)
Weight	4.25 kgs (single packing) 17kgs (4units/carton)

DMX Channel List:-10CH Mode: **A**

CHANNEL	FUNCTIONS
1	Dimmer
2	Strobe Effect
3	Auto-Run
4	Auto-Run Speed
5	RED
6	GREEN
7	BLUE
8	WHITE
9	AMBER
10	Zoom Function

6CH Mode: **d**

CHANNEL	FUNCTIONS
1	RED
2	GREEN
3	BLUE
4	WHITE
5	AMBER
6	Zoom Function

LED Display Menu Operating Instructions:-

Item	Menu	Remark
1	A001	11CH DMX Address (001-512) Press "up" & "down" change Address Value
2	d001	7CH DMX Address (001-512) Press "up" & "down" change Address Value
3	CC99	RGBWAUV Color Changing (01-99) Press "up" & "down" change color changing speed
4	CP99	RGBWAUV Color Chasing (01-99) Press "up" & "down" change color chasing speed
5	dE99	RGBWAUV Color Combination Changing (01-99) Press "up" & "down" change color combination changing speed
6	Soud	Sound Active
7	r255	Red Color (001-255)
8	G255	Green Color (001-255)
9	b255	Blue Color (001-255)
10	o255	White Color (001-255)
11	y255	Amber Color (001-255)
13	t255	Zoom (001-255)